CT23MT21

Double DIN Fitting Kit

for Mitsubishi Vehicles



IN THE KIT

- *Double DIN Fascia Panel*
- *Radio Brackets*

APPLICATION

Note: Application data is subject to change at any time

Mitsubishi ASX	**2014 - UP**
Mitsubishi Outlander Sport	**2014 - UP**

Note: this product is for vehicles without a silver trim on the original vehicle fascia.

FEATURES

- **Allows for the installation of a single/double DIN aftermarket stereo**
- **Includes mounting brackets and fitting accessories**
- **Finished in gloss black to match vehicle dashboard**

DISCLAIMER

The information provided in this document is subject to change without notice due to manufacturer changes and/or improvements to the product/s. This instruction manual is based on documented data and research. The manufacturer of this product cannot be held responsible for any changes made to the vehicle by the manufacturer or damages that may occur through the installation of this product in accordance with the steps outlined herein.

PRIOR TO INSTALLATION

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Please ensure that the correct tools are used during the installation to avoid damage to the vehicle or product. ***Connects2 can not be held responsible for the installation of this product.***

INSTALLATION GUIDE

DASH DISASSEMBLY

1.




Begin by using a panel removal tool to pry the main fascia trim up and away from the dashboard.

2.



When pulling the fascia away from the dashboard, proceed to disconnect all of the wiring to the airbag and hazard switch panel.


3.

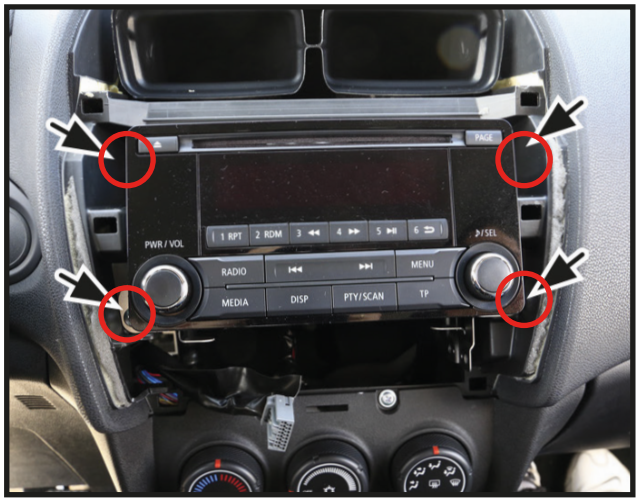

With the fascia removed, proceed to undo the 4x screws that surround the main head unit.

INSTALLATION GUIDE


4.

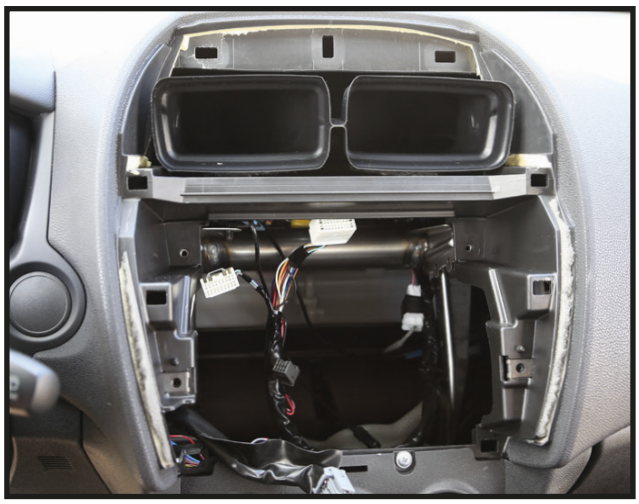

Once the radio is unscrewed, remove it from the dashboard and disconnect all of the wiring.

FASCIA ASSEMBLY

5.

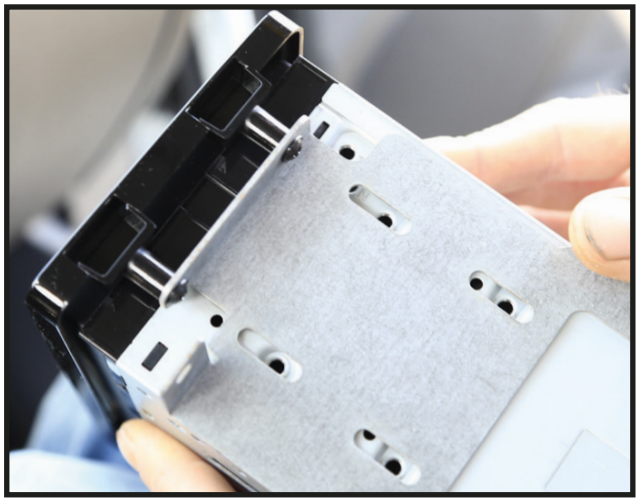

Take the brackets in the kit and attach them to the appropriate sides of the new stereo. Then offer the fascia to the front of the stereo and screw them into place using the screws within the kit.

DASH ASSEMBLY

6.



Connect up the stereo connections and proceed to install it into the dashboard using the pre-existing screws. When housed correctly, reinstall the original fascia to complete the installation.

NOTES